

BALLOONLIGHT 9m

- Altezza massima 9m
- Palo telescopico in acciaio zincato
- 4 stabilizzatori regolabili in altezza
- Sistema idraulico di sollevamento
- Stabilità al vento certificata sino a 80 Km/h
- Cavo elettrico spiralato con tubo di protezione
- Interruttori On/Off per ogni singola lampada
- Pallone illuminante in materiale plastico con una potenza illuminante complessiva di 3000W con lampade agli ioduri metallici
- Lampade incorporate
- Componenti elettrici delle lampade agli ioduri metallici posti alla base della torre per una facile manutenzione
- Valvola di sicurezza per consentire la discesa della torre in caso di avaria del sistema idraulico
- Allestimento della struttura su carrello traino lento non omologato monoassale
- Serbatoio da 116 litri per una elevata autonomia
- Vasca raccolta liquidi per evitare fuoriuscite di carburante sul terreno
- Gancio centrale di sollevamento
- Gruppo elettrogeno da 9KVA supersilenziato 90Lwa - 1500 g/min - Motore Kubota diesel
- Uscita monofase da 3 KVA - 230V protetta da interruttore termico

Accessori optional:

- KIT CARRELLO TRAINO VELOCE OMOLOGATO (vedi pag. 49)
- VERSIONE CON SELETTORE PER SFRUTTARE TUTTA LA POTENZA DEL GENERATORE (9KVA MONOFASE) ESCLUDENDO LA TORRE FARO

- Maximum height 9m
- Telescopic galvanized mast
- 4 stabilizers adjustable in height
- Hydraulic lifting system
- Certified wind stability until 80 Km/h
- Electric coiled cable complete with housing
- On/Off switches one for each lamp
- Plastic balloon for the illumination with a total power of 3000W with metal halides lamps
- Included bulbs
- Electrical device of the metal halide heads placed at the base of the tower for a simple maintenance operation
- Safety valve to permit the lowering of the tower in case of damage of the hydraulic system
- Structure assembled on slow trailer not homologated
- 116 litres long run fuel tank
- Bunded tank to avoid fuel spillage on the ground
- Central lifting hook
- 9KVA super silent generating set 90Lwa 1500rpm Kubota engine diesel
- 3KVA - 230V outlet with ELCB protection

Optional accessories:

- KIT FAST TRAILER HOMOLOGATED ONLY FOR ITALY (see page 49)
- VERSION WITH SELECTOR SWITCH FOR USING ALL THE POWER OF THE GENERATOR (10KVA SINGLE PHASE) AND CUT OFF THE LIGHTING TOWER


Gruppi elettrogeni Generating sets

BALLOONLIGHT 9m

9 KVA incorporato
9 KVA incorporate

Diagramma illuminotecnico Lighting footprint calculation

BALLOONLIGHT 9m 1x3000W JM
Area 3600 mq. - 20 Lux medi/average

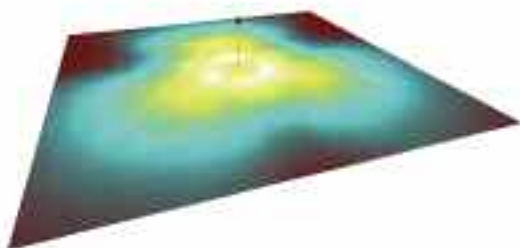

Aree illuminate - Illuminated areas

BALLOONLIGHT 9m

3600 mq.



BALLONLIGHT 9m

Torri Faro - Lighting Towers



Modello Model	Proiettori Floodlights	Dimensione chiusa Close dimension	Dimensione aperta Open dimension	Peso Weight
BALLONLIGHT 9m	1x3000W joduri met. / metal halide	3450x1400x2510 mm	3450x2470x9000 mm	1046 Kg